

THE RAVENS **MAGNUM 60** PLATFORM

By Kruz

BRUTE STRENGTH AT ALUMINUM WEIGHT




PLATFORM ALUMINUM TRAILER

Built from high strength aluminum alloys, Ravens 'Magnum 60' by Kruz is built without the bulk, improving your payload capacity.

Ravens 'Magnum 60' by Kruz platform trailers -- with their distinctive swirl finish -- are available at dealers from coast to coast.

Kruz

High Strength, Heavy-Duty, Aluminum Performance

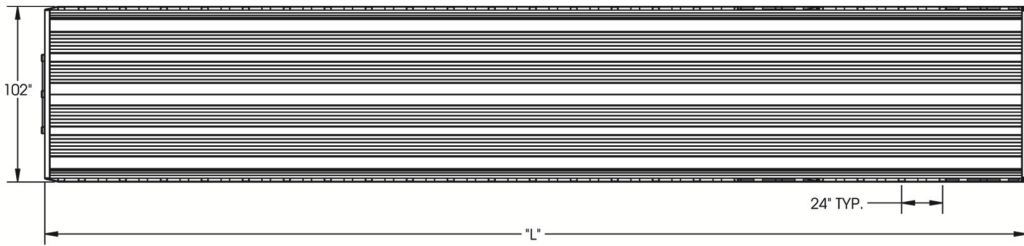

Beam Load Ratings*				
Trailer Size	4 FT.	8 FT.	20 FT.	Base** Weight
48'	60,000	66,000	80,000	8,900

* Load ratings calculated based on 10 ft. widespread suspension
 ** Base model without options. Selected options may increase or decrease weight of finished trailer



28 1/2-inch-deep main beams taper to 12 inches in the nose and 19 1/2 inches at the rear, giving extra capacity for concentrated loads.



Galvanized suspension hangers and landing gear braces are standard



Hollow-core, 1-1/2-inch-deep floor of tough 6061-T6 aluminum alloy is welded along its full length to main beams to reinforce upper body strength

Specifications

- Floor** 1-1/2" depth, multi-hollow core extruded aluminum (6061-T6) with (2) wood nailers
- Main Rail** 12" deep in neck, 28 1/2" deep in main, 19 1/2" deep at rear
- Outer Rail** 6-3/4" deep extruded aluminum (6061-T6) one piece with integrated "J" track
- Rub Rail** 3-1/4" wide x 3/8" aluminum full length each side 6061-T6
- Front Channel** 9-3/4" deep one piece full width (6061-T6), square corners
- Crossmembers** 5" aluminum channel (6061-T6) on 15" centers.
- Bumper** Four (4) heavy-duty vertical risers with 4" wide horizontal tube.
- Dock Bumper** Two rubber bumpers.
- Stake Pockets** 4" H x 4" W x 1-5/8" D inside dimension on 24" centers with one (1) HD spool
- Mud Flaps** Heavy-duty spray suppressant black rubber
- Lengths** 45', 48' or 53'
- Widths** 96" or 102"
- Tires** 295/75R22.5
- Wheels/Disc** Eight (8) 8.25 x 22.5", 10-hole disc, hub piloted, unimount, machine finish aluminum wheels.
- Hubs** Four (4) 10-stud Duralite, hub piloted.
- Drums** Outboard mount light-weight hub piloted.
- Brakes** 16-1/2" x 7" Q-plus, non-asbestos lining with quick-change features, automatic slack adjusters, 4S/2M ABS system standard with aluminum air tank
- Suspension** Air ride
- Axles** 71-1/2" or 77-1/2" track to match suspension.
- Upper Coupler** 48" height nominal
- Landing Gear** Aluminum two-speed 50,000-lb capacity
- King Pin Plate** 1/2" aluminum plate, 30" from front standard
- Electrical** DOT, sealed LED lights and harness
- Finish** Swirl-finished aluminum suspension frame. All steel parts are galvanized.



Four (4) heavy-duty vertical risers with 4" wide horizontal tube bumper



Galvanized forklift package available

PHOTOS MAY SHOW OPTIONAL EQUIPMENT.
 PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.